


0/23/85

1) pump oil valve out

E side pump

(W side = dp side)

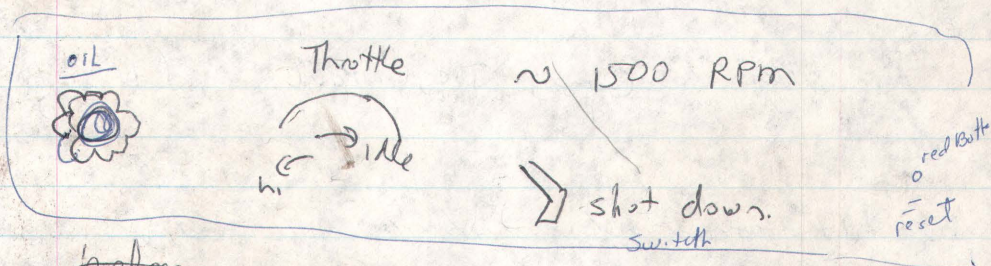

before

idle, neutral to start, Turn key, push in ^{hold} reset
idle, neutral to stop, push down shot down switch

Check Temp

Vacuum $\sim 22-23$ "

Vacuum gauge on intake.

Don't touch rel. of valve.

(If dies entirely.)
repair, etc.

3/23/85 Friday

Crew: TP, DF, GK, J.R, BO, DD,
GHD.

Volunteers: Greg Jones

Others: George, Joe, Paul
Divers: Rick/
(Bill Tanna
people).

activities: Final adjustments of leader,
sinks of points.

progress: About 14 points were
jettied into place along S W section
(S edge of 'pond' C).

Crane lifted casing w/ drag line, casing
was jettied in, point placed in
center of casing + lowered w/ rope
from crane, point was sanded
to top w/ coarse sand, casing removed,
+ swivel connected to points.